

Project	Item Number	Quantity
---------	-------------	----------

--	--	--

SRM8



MADE IN THE USA

SRM8

Professional Countertop Mixer

Models:

SRM8: 8 qt. Countertop Mixer



**8 QT COUNTERTOP
MIXER**

Features

- Ultra powerful 1/2 HP Capacitor Start Motor
- Variable Speed Drive
- Change speeds without having to stop the mixer
- One-piece, stainless steel, safety guard
- Heavy-duty stainless steel bowl
- Low voltage protection prevents accidental start-up after power failure
- Hardened alloy gears in transmission
- Durable NSF approved hybrid epoxy/polyester powder coat finish
- Cord and plug

Standard Accessories

- Stainless steel bowl
- Batter beater
- Wire whip
- Dough hook
- 15 Minute Timer

Warranty

- Two-year, on-site parts & labor warranty


Univex Corporation

WARRANTY DETAILS

The SRM8 mixer carries a two-year, on-site parts and labor warranty against any flaws in materials and workmanship. This period begins on the date of purchase and, provided the unit is used in accordance with our instructions, is in full effect for two years from that date. Any work performed under this warranty must be performed between the hours of 8:00 a.m. and 5:00 p.m. Monday through Friday. Univex will not pay for overtime charges for work performed other than during normal business hours. Damage incurred in transit or from installation error, accident, alteration or misuse is not covered. Univex shall not be liable for any consequential compensatory, incidental, or special damages. Contact the Univex service department for any warranty claims.

Compact Countertop Mixer

SRM8

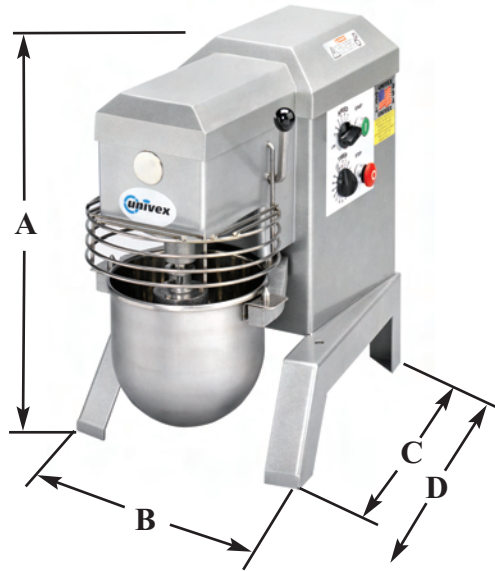

Dimensions:

A) Height:	21"	(533mm)
B) Width:	15"	(381mm)
C) Depth (leg to leg):	17 3/4"	(450mm)
D) Overall Depth	22"	(559mm)

Shipping Information:

Freight Class:	85	
SRM8 Net Weight:	85 lb.	(39kg)
SRM8 Shipping Weight:	103 lb.	(47kg)
Shipping Box Dimensions:		
Height:	26"	(660mm)
Width:	19"	(483mm)
Length:	24"	(610mm)

Capacity:

SRM8: 8 Quarts (7.6 liters)

Motor:

1/2 hp. capacitor start

Electrical:

115V, 60HZ, 1PH, 11.5A
Other voltages available.
Contact factory.

Controls:

Momentary contact STOP & START buttons.
Rotary speed control dial.
15 minute timer.

Lubrication:

Food grade grease.

Finish:

NSF approved hybrid epoxy/
polyester powder coat.

Bowl:

Heavy gauge stainless steel.

Bowl Guard:

Heavy-duty, one-piece,
stainless steel safety guard. Swing
up for full access to bowl. Guard
must be closed for mixer to
operate.

Speeds:

The variable speed controller runs the
beater head shaft from 85 to 350 RPM.

Bowl Lift:

Ergonomic hand operated crank,
self-locking in up and down positions.

**Specifications Subject To Change
Without Notice.**

Printed in the USA

10/09