

RSRG5

Bakery Oven

**Univex Corporation** 

#### WE RAISE THE BAR. WE SET THE STANDARD.

Item Number **Project** Quantity



## **Rotating Single Rack Bakery Oven**

#### Model:

RSRG5- Gas





#### **Features:**

- Rotating rack bakery ovens combine the efficiency of a convection oven with the uniform results of a rotating rack
- Unique compact design provides for all the features of the oven within a small footprint
- Heat elements are in direct contact with the baking chamber making space and heat exchange optimized so that less energy is consumed
- Programmable touch screen control panel with multiple user programs.
- Built in ramp for easy wheel in and out access.
- Capabilities to build on site or ship fully assembled.
- Holds 1 single oven rack.
- Reversible bake chamber door (Left or Right Hinge)
- Cooking Chamber structure is AISI 304 Stainless steel
- 5 Fan Speeds for maximum effeciency.

# Tray size:

18"x26" (46x66cm)

## **Number of trays:**

15

#### **Options:**

- Correctional Package
- Revolving Platform
- Automatic Lift (for heavy loads)
- Stainless steel exterior

## Warranty:

One year, on-site parts and labor




**Univex Corporation** www.Univexcorp.com 3 Old Rockingham Rd Salem, NH 03079 United States of America


TEL: (800)258-6358 INTL TEL: (603)893-6191 FAX: (800)356-5614 INTL FAX: (603)893-1249




## **Rotating Single Rack Oven**

RSRG5

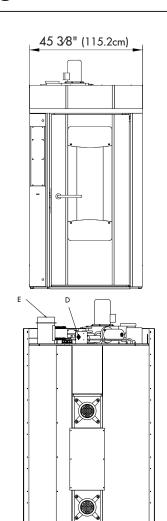





#### Plug Info: Hard Wire With Shutoff

- A- Power supply inlet
- B- Chamber vapor discharge ø 5 5/8" (14cm)
- C- Water discharge 1/2"
- D- Water inlet 3/4"
- E- Smoke discharge
- F- Burner

Water: 7-43 PSI

 $^{\ast}$  The water needs to be filtered and softened with a hardness of 3.5 - 7 G/Gal

The purchaser is responsible for all installation costs and for providing: Disposal of packing materials, labor to unload oven upon arrival, installation mechanics, and all local service connections including electricity, gas, water, vents and drain per local code. In order to validate warranty, start-up must be performed by an authorized service company. All services must comply with federal, state and local codes.

Cooking chamber structure: AISI 304 stainless steel

Minimum clearance away from flammable walls and other appliances: 3.9" (10cm)

Fan speed's: Five

Minimum distance away from wall to be cleaned and serviced: 19.7" (50cm)

Oven Weight

\*This Unit Requires a 5 wire cord, with a dedicated neutral.

BTU: 160000

Electrical Information (60Hz)				
	Voltage	Phase	hp(kW)	Amps
Standard Voltage	208-240	3	1.263 (0.942)	4.3



Univex Corporation www.Univexcorp.com

3 Old Rockingham Rd Salem, NH 03079 United States of America TEL: (800)258-6358 INTL TEL: (603)893-6191 FAX: (800)356-5614 INTL FAX: (603)893-1249

Printed in U.S.A. REV 1 01/2017 LH-880