

univex

SRMF20+ Mixer

Project Item Number Quantity



Features:

- 1/2 hp capacitor start motor
- Variable Speed Drive: 4 fixed speeds or any speed in-between
- Change speeds without having to stop the mixer
- Two-piece, stainless steel, dishwasher safe safety guard
- Heavy-duty stainless steel bowl
- Interlock switches protect operator from injury if safety guard is open or bowl is lowered
- Hardened alloy gears in transmission
- Durable NSF approved hybrid epoxy/ polyester powder coat finish

20 Quart (qt.) Floor Model Mixer

MADE IN THE USA

Model:

> SRMF20+: 20 qt. FLOOR MODEL MIXER (WITH OR WITHOUT PTO HUB)





Standard Accessories:

- 20 qt. stainless steel bowl
- Dough hook
- Batter beater

- Wire whip
- Ingredient chute
- Bowl scraper

Optional Accessories:

- 15 minute timer
- Heavy duty SS wire whip
- Sweet dough beater
- Splash ring

- 20 qt. pastry knife
- Four wing beater
- Cover

Optional Attachments:

- #12 Power Take-Off (PTO) hub
- VS9 vegetable slicer with adjustable knife
- VS9H vegetable shredder with plate holder and 3/16" plate (additional plate size variations, grater plates, and julienne plate available)
- ALMFC12 meat and food grinder

Warranty:

• Two year, on-site parts and labor




Univex Corporation www.Univexcorp.com

3 Old Rockingham Rd Salem, NH 03079 United States of America TEL: (800)258-6358 INTL TEL: (603)893-6191 FAX: (800)356-5614 INTL FAX: (603)893-1249



20 Quart Floor Model Mixer

SRMF20+

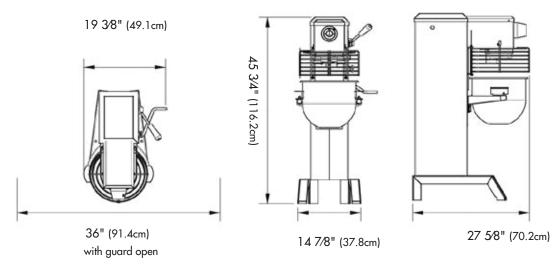

^{*}Shown with optional PTO and timer

Shipping Information						
Net Weight Shipping Weight Overall Dimensions						
230 lbs. (104.3Kg)	284 lbs. (128.8Kg)	56" (142.2cm) H x 36" (91.4cm) W x 33" (83.8cm)				
The weight and dimensions of the pallet are included in the weight and dimensions above.						

Electrical Information (60Hz)								
Attached 6 foot cord								
	Voltage	Phase	AMPS	NEMA				
Standard	115	1	10.6	5-15P				
Optional	208-240	1	4.8-5.3	6-15P				

Mixer Speeds								
Speed	1	2	3	4				
Beater Shaft (RPM)	135	260	435	528				
PTO (RPM)	62	133	198	238				

Bowl Capacity: 20 qts. (18.9 liters)

Motor: 1/2 hp capacitor start

Controls: Momentary contact stop & start buttons

and contactor

Bowl Lift: Ergonomic hand operated crank, self locking

in top and bottom position

Transmission: Featuring hardened alloy gearing and torque sensing variable speed pulleys



Univex Corporation www.Univexcorp.com

3 Old Rockingham Rd Salem, NH 03079 United States of America TEL: (800)258-6358 INTL TEL: (603)893-6191 FAX: (800)356-5614 INTL FAX: (603)893-1249